



BILL30M

AUTOMATIONS FOR SWINGING GATES LINEAR TELESCOPIC OPERATOR

personalised release key
up to 2.5 m



CONTROL PANELS:

BILL30M

BRAINY
HEADY


p.112
p.113



230 Vac

- Irreversible 230 Vac electromechanical geared motor with easy access release from above
- Neat design and size, particularly suited to forged iron gates
- Easy and quick to install due to compact size and installation dimensions

- Worm protected by a scraper ring and stainless steel stem, suitable for use in dusty and sandy environments or where there are aggressive atmospheric agents.
- Available in right or left version

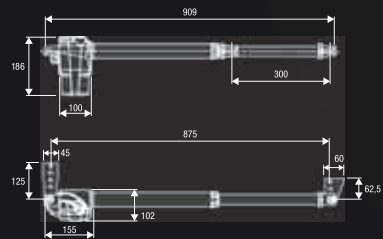

MEASURES

| | | |
|---------|---------|---------|
| | A | B |
| BILL30M | 100-150 | 100-150 |

COMPLETE KITS

KBILL30M 9592184

2 BILL30M 230 Vac Operators

1 HEADY 230 Vac control unit with integrated receiver

1 PUPILLA.F Pair of photocells

1 LAMP.LED 230 Vac Led flashing light with built-in aerial


1 TOKEY Metal key selector

1 TO.GO2WV 433.92 MHz Transmitter



B.SR
9819310

Multiposition brackets for one operator BILL30M.



BILL30.CO
9253001

Telescopic stem cover accessory for models BILL30M.



DU.V96
9765035

12 Vac/dc vertical electric lock, supplied with counterplate. Permits internal/external release.



DU.V90
9765030

12 Vac/dc horizontal electric lock, supplied with counterplate. Permits internal/external release.



DU.9990
9623010

Covering plate for DU.V90.



E.LOCK
9765001

230 Vac vertical electric lock, supplied with counterplate.



E.LOCKSE
9765002

Extended cylinder for E.LOCK electric lock. It allows to unlock gates up to 55mm-thick from the outside.



ID.TA
9846019

Warning board.



ESA BASIC
9176108

System that reduces the electrical energy consumption.

MADE IN ITALY

TECHNICAL DATA

| | BILL30M |
|-----------------------|---------------------------|
| Code | 9592100 (R) / 9592101 (L) |
| Power supply | 230 Vac (50-60Hz) |
| Motor supply | 230 Vac |
| Max absorbed current | 1.1 A |
| Max Thrust | 2800 N |
| Opening time | 16" |
| Operation cycle | 30% |
| Standard stroke | 300 mm |
| Max stroke | 320 mm |
| Protection level | IP54 |
| Operating temperature | -20°C / +50°C |
| Leaf max dimension | 2.5 m |
| Weight | 5.7 kg |
| Items no. per pallet | 66 |
| Kits no. per pallet | 32 |